

# STAIRTREADS



**Ramsay**  
A+C+C+E+S+S

Head Office

61 West High Street


Forfar, Angus

Scotland DD8 1BH


Tel: Forfar (01307) 462255

Fax: Forfar (01307) 466956


## GRATING STAIRTREADS

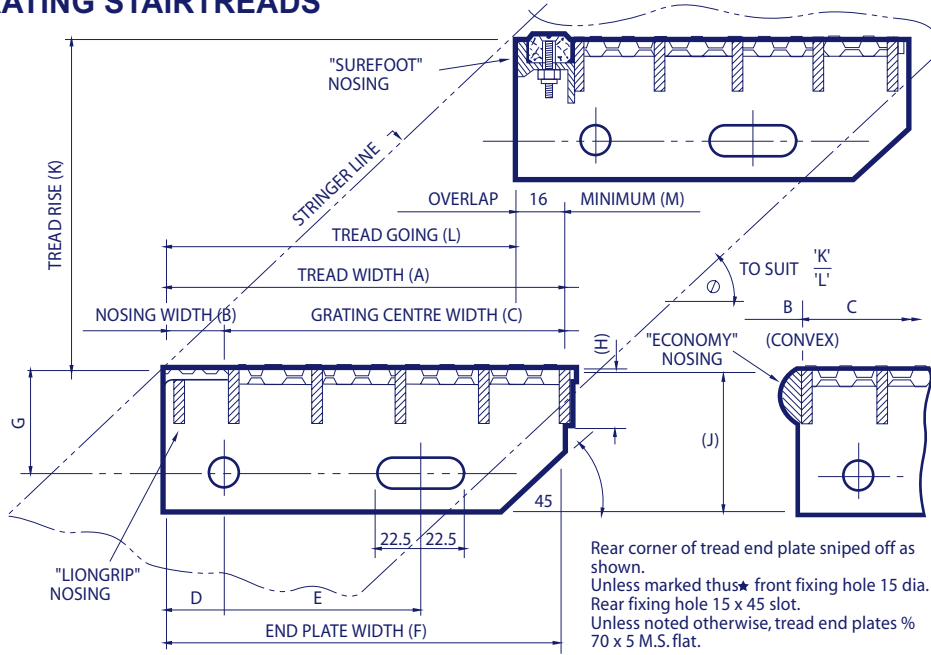

## DIAMOND MESH STAIRTREADS

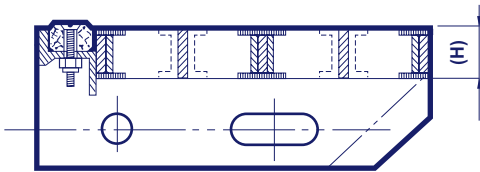

## CHEQUER PLATE STAIRTREADS

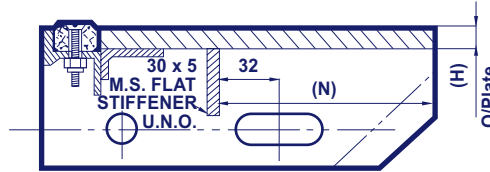

## MAXIMUM RECOMMENDED LENGTH FOR STAIRTREADS

Standard Widths and Stairtread Centre Type	STAIRTREADS			STAIRTREADS			STAIRTREADS			MESH			MESH			MESH			C/PLATE			C/PLATE			C/PLATE		
	68 (N)	90 (W)								86 (S&R)							W	L	d	W	L	d	W	L	d		
																	80	1076	3.2	80	971	2.8	80	1075	3.3		
	98 (N)			93 (N)			101 (N)						111 (S&R)				115	1121	3.4	115	1036	3	115	1113	3.4		
		128 (N)		115 (W)			123 (W)				125 (S)				119 (S&R)		150	1155	3.5	150	1079	3.1	150	1145	3.5		
			131 (W)		123 (N)			131 (N)			127 (R)						150	1155	3.5	150	1079	3.1	150	1145	3.5		
		158 (N)			153 (N)			161 (N)			163 (S)		150 (S)		158 (S)		150	1155	3.5	150	1079	3.1	150	1145	3.5		
			172 (W)		156 (W)			164 (W)			166 (R)		152 (R)		160 (R)		185	1185	3.7	185	1112	3.3	185	1172	3.6		
		188 (N)			183 (N)			191 (N)					188 (S)		196 (S)		185	1185	3.7	185	1112	3.3	185	1172	3.6		
			213 (W)		197 (W)			205 (W)			204 (S&R)		191 (R)		199 (R)		220	1211	3.8	220	1141	3.4	220	1197	3.7		
		218 (N)			213 (N)			221 (N)					229 (S&R)				220	1211	3.8	220	1141	3.4	220	1197	3.7		
			248 (N)		238 (W)			246 (W)			244 (S&R)				237 (S&R)		225	1235	3.9	225	1167	3.5	225	1220	3.8		
		254 (W)			243 (N)			251 (N)					269 (S&R)				225	1235	3.9	225	1167	3.5	225	1220	3.8		
			278 (N)		273 (N)			281 (N)			283 (S&R)				277 (S&R)		290	1259	4.1	290	1192	3.7	290	1242	3.9		
		295 (W)			279 (W)			287 (W)			322 (S)						290	1259	4.1	290	1192	3.7	290	1242	3.9		
			308 (N)		303 (N)			311 (N)			324 (R)				316 (S&R)												
Load Bearing Bar Size and Maximum Length																											
20x3	614	658	699	515	569	617	597	665	683	743	588	668	799														
20x5	699	763	821	617	690	755	732	841	760	837	677	772	869														
25x3	733	803	868	643	722	795	846	944	843	936	767	868	981														
25x5	868	966	1055	795	901	996	1004	1095	962	1078	897	1020	1092														
30x3									1035	1163	983	1119	1206														
30x5	1070	1205	1327	1021	1162	1288	1228	1311	1200	1358	1157	1280	1308														

The above maximum recommended lengths shown for Durbar chequer plate stairtreads have been determined by allowing for a 30x5 M.S. stiffening flat.

'W' denotes tread width  
'L' denotes maximum recommended length  
'd' denotes deflection @ maximum length when using stiffening flat of size stipulated above.

